


ALUMINUM ELECTROLYTIC CAPACITORS

* DIMENSIONS

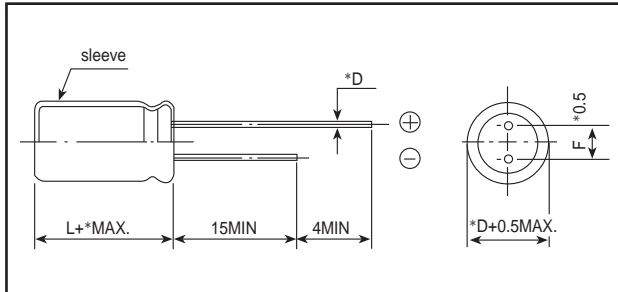

(mm)							
*D	5	6.3	8	10	13	16	18
*d	0.5		0.6		0.8		
F	2.0	2.5	3.5	5.0		7.5	
*	L*16:*=1.5			L*20:*=2.0			

* STANDARD SIZE MAX. PERMISSIBLE RIPPLE CURRENT

Ripple Current(mA r.m.s./105*,100kHz)

Rated voltage 6.3V(OJ)				
Nominal capacitance(*F)	Size *D x L(mm)	Ripple Current	Impedance *(MAX)	
			20*, 100kHz	-10*, 100kHz
150	5x11	250	0.30	1.0
330	6.3x11	405	0.13	0.41
560	8x11.5	760	0.072	0.22
820	8x16	995	0.056	0.17
1200	8x20	1250	0.041	0.13
1000	10x12.5	1030	0.053	0.16
1200	10x16	1430	0.038	0.12
1500	10x20	1820	0.023	0.069
2200	10x23	2150	0.022	0.066
3300	13x20	2360	0.021	0.053
3900	13x25	2770	0.018	0.045
4700	13x30	3290	0.016	0.041
5600	13x35	3400	0.015	0.039
5600	16x20	3140	0.018	0.045
6800	16x25	3460	0.016	0.043