


ALUMINUM ELECTROLYTIC CAPACITORS

* DIMENSIONS

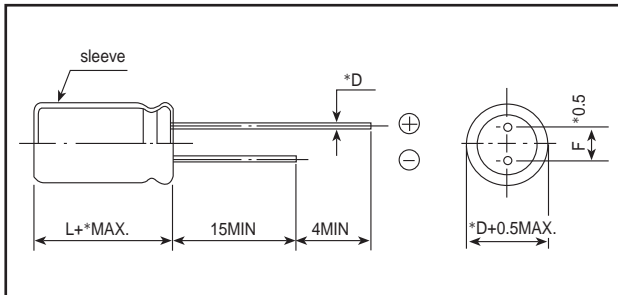

	(mm)			
*D	10	13	16	18
*d	0.6		0.8	
F	5.0		7.5	

* STANDARD SIZE MAX. PERMISSIBLE RIPPLE CURRENT

Size**D* x *L* (mm) Ripple Current(mA r.m.s./105*,120Hz)

WV(V.DC) Cap(*F)	160V (2C)		200V (2D)		250V (2E)	
	Size	Ripple	Size	Ripple	Size	Ripple
10	10 x 16	250	10 x 16	250	10 x 20	280
22	10 x 20	500	10 x 20	500	13 x 20	600
33	10 x 20	500	13 x 20	600	13 x 20	600
47	13 x 20	660	13 x 20	660	13 x 25 16 x 20	720
68	13 x 25 16 x 20	760	13 x 25 16 x 20	760	16 x 25 18 x 20	920
100	16 x 25 18 x 20	1120	16 x 25 18 x 20	1120	16 x 31.5 18 x 25	1200
150	16 x 31.5 18 x 25	1360	16 x 31.5 18 x 25	1360	18 x 31.5	1500
220	16 x 31.5 18 x 25	1400	18 x 31.5	1700		

WV(V.DC) Cap(*F)	350V (2V)		400V (2G)		450V (2W)	
	Size	Ripple	Size	Ripple	Size	Ripple
6.8	10 x 16	220	10 x 16	220	10 x 20	150
10	10 x 20	280	10 x 20	280	13 x 20	320
22	13 x 20	350	13 x 25 16 x 20	430	16 x 25 18 x 20	560
33	16 x 20	500	16 x 25 18 x 20	640	16 x 31.5 18 x 25	700
47	16 x 25 18 x 20	660	16 x 31.5 18 x 25	840	18 x 31.5	880
68	16 x 31.5 18 x 25	850	18 x 31.5	1000		