


Specification of Metal Film RVM-06/RVM-08


TRIMMER POTENTIOMETER

CHARACTERISTIC REFERENCE

(A) DERATING CURVE

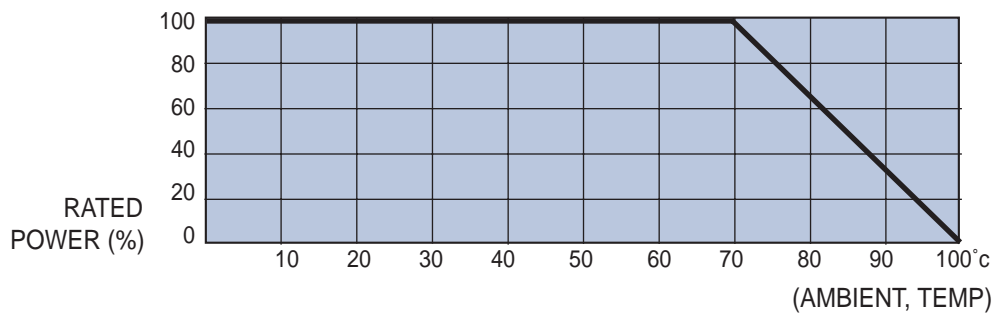

(B) RESISTANCE TAPER (LINEAR TAPER B CURVE)

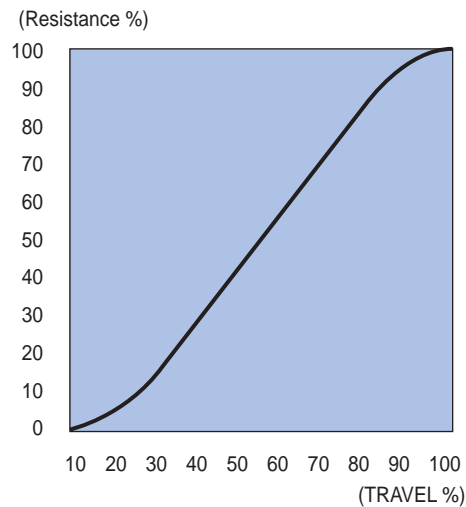

ENVIRONMENTAL SPECIFICATION

| ITEM \ DESCRIPTION | RVM-06 | RVM-08 |
|-------------------------|---|--------|
| Humidity test | total resistance value to be within $\pm 3\%$ | |
| Humidity load life test | total resistance value to be within $\pm 3\%$ | |
| Load life test | total resistance value to be within $\pm 3\%$ | |
| Solder immersion test | total resistance value to be within $\pm 3\%$ | |
| Temperature coefficient | ± 100 ppm/ °c | |