


Specification of VR-09 Metal Film


TRIMMER POTENTIOMETER

CHARACTERISTIC REFERENCE

(A) DERATING CURVE

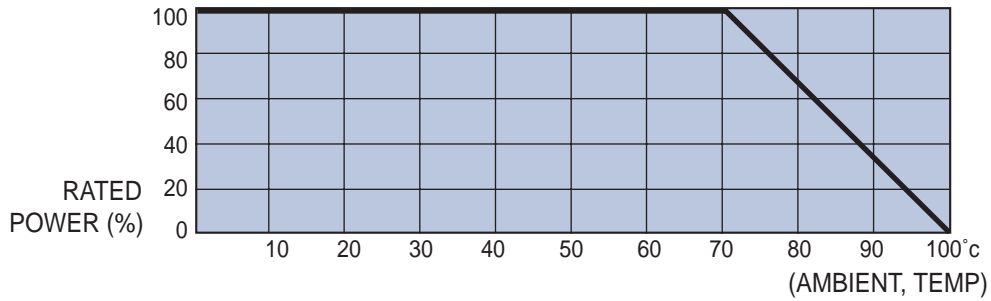

(B) RESISTANCE TAPER (LINEAR TAPER B CURVE)

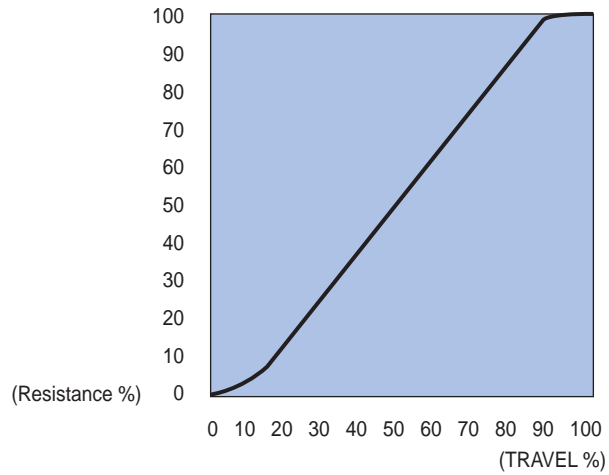

ENVIRONMENTAL SPECIFICATION

DESCRIPTION ITEM	VR-09
Humidity test	total resistance value to be within $\pm 3\%$
Humidity load life test	total resistance value to be within $\pm 3\%$
Load life test	total resistance value to be within $\pm 3\%$
Solder immersion test	total resistance value to be within 3% @ pass 300°C 3sec
Temperature coefficient	$100\Omega \leq R < 100K\Omega$ $\pm 200PPM$, $100K\Omega \leq R$ $\pm 250PPM/^\circ C$