


Ordering Code

Example:

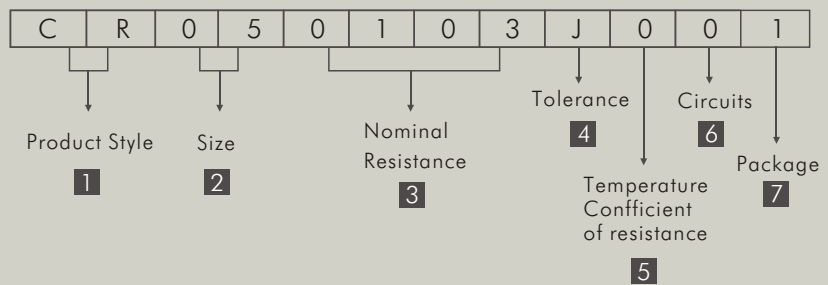

1 Product Style	
Code	Type
CR	Single Chip
RA	Chip Array-4R
RB	Chip Array-2R
RC	Chip Array-8R
RN	Chip Network

2 Size		
	Code	Size
CR	02	0402
	03	0603
	05	0805
	06	1206
	20	2010
RA	03	034R
	02	024R
RB	02	022R
RC	02	028R(16P8R)
RN	02	028R(10P8R)

3 Nominal Resistance	
E24 Series 2%, 5% Eg. 0473 = 47K Ω	3 Digits
E96 Series 0.1%, 0.25%, 0.5%, 1% Eg. 71K5 = 71.5K Ω	4 Digits
Zero Ohm Jumper	000

4 Resistance Tolerance	
Code	Resistance Tolerance
B	$\pm 0.1\%$
C	$\pm 0.25\%$
D	$\pm 0.5\%$
F	$\pm 1.0\%$
G	$\pm 2.0\%$
J	$\pm 5.0\%$
K	$\pm 10.0\%$

5 Temperature Coefficient Of Resistance	
Code	Temperature Coefficient Of Resistance
0	$\pm 100\text{ppm}/^\circ\text{C}$
1	$\pm 25\text{ppm}/^\circ\text{C}$
2	$\pm 50\text{ppm}/^\circ\text{C}$
3	$\pm 200\text{ppm}/^\circ\text{C}$
4	$\pm 250\text{ppm}/^\circ\text{C}$
5	$\pm 400\text{ppm}/^\circ\text{C}$
6	$\pm 500\text{ppm}/^\circ\text{C}$
7	$\pm 1500\text{ppm}/^\circ\text{C}$

6 Circuits	
Code	Circuits
0	NA
1	028R(10P8R)R type
2	028R(10P8R)S type

7 Package	
Code	Package
1	5K Paper Taping
2	10K Paper Taping
3	20K Paper Taping
4	4K Emboss Taping
5	Bulk
A	5K BOX
B	10K BOX
C	25K BOX
D	50K BOX